

# 17713SS

FLASHED L-FOOT  
FOR ASPHALT SHINGLE ROOFS



A DIVISION OF QUICKSCREWS INTERNATIONAL CORP

# SPEC SHEET

Part #	Box Quantity	Size
17713SS	Galva Flashing (20) + Stainless Steel L-Foot (20) + Solar Mounting Screws (20)	5/16" x 4"





15987BSS		Customer			
5mm					
<p><b>Technical requirement :</b> The dimensions of the hooks are in accordance with the drawings. Surface smooth, without burr.</p>					
Baiting tolerance	± 2 mm	<b>Material:</b>	304SS	<b>Mapper:</b>	
Hole tolerance	± 0.2 mm		<b>Date:</b>		2017. 11. 28
Hole distance tolerance	± 0.5 mm				
Form tolerance	± 2 mm				
Thickness tolerance	± 0.1 mm				
Angle tolerance	± 1°				

Part# 15993

Included in Kit 17713SS

Customer

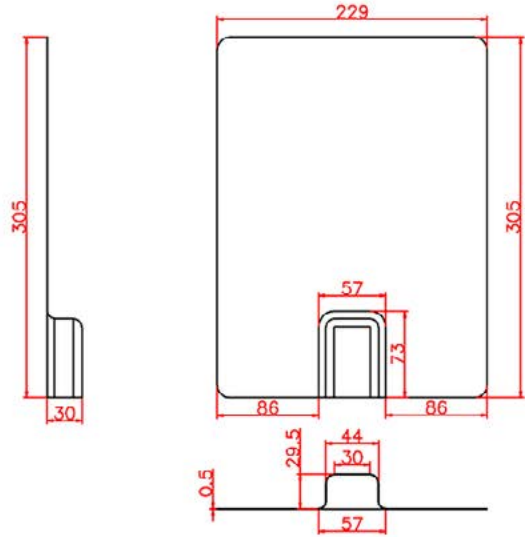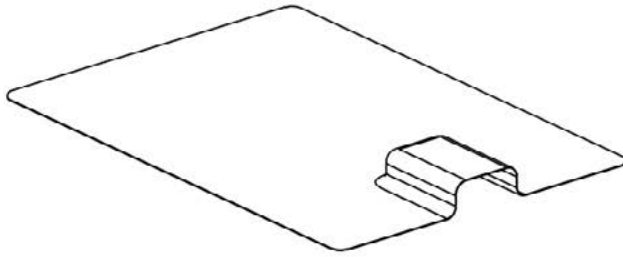

**Technical requirement :** The dimensions of the hooks are in accordance with the drawings.  
Surface smooth, without burr.

Baiting tolerance	± 2 mm	<b>Material:</b>	Galvalume with Black Powder Coating	<b>Mapper:</b>	
Hole tolerance	± 0.5 mm				
Hole distance tolerance	± 0.5 mm	<b>Date:</b>	10/10/18	<b>Auditor:</b>	
Form tolerance	± 2 mm				
Thickness tolerance	± 0.1 mm				
Angle tolerance	± 1° mm				