

17717SS

FLASHED SPLIT TOP L-FOOT
FOR ASPHALT SHINGLE ROOFS



A DIVISION OF QUICKSCREWS INTERNATIONAL CORP



SPEC SHEET

Part #	Box Quantity	Size
17717SS	Flashing + L-Foot + Dacro Screws with Sealing Washer (20ea.)	1/4" X 3"



17717SS
Kit Includes
15993, 17596SS, 17759

Customer	QuickBOLT
----------	-----------

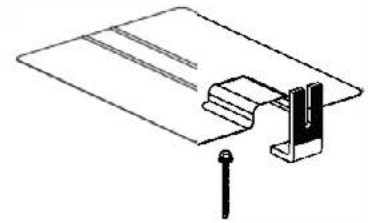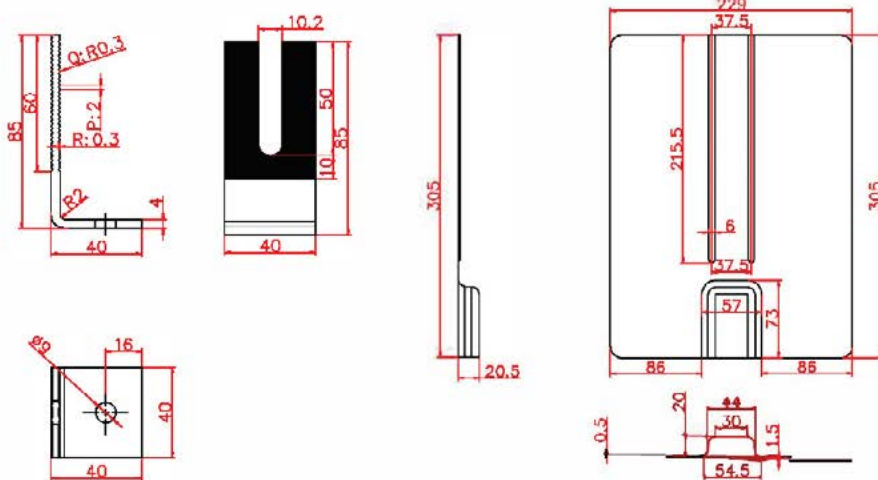

Flashing must be flat.



Technical requirement : The dimensions of the hooks are in accordance with the drawings.
Surface smooth, without burr.

Baiting tolerance	± 2 mm	Material:	Galva + SS304 + Dacrodized	Mapper:	
Hole tolerance	± 0.5 mm				
Hole distance tolerance	± 0.5 mm	Date:	2018. 07. 17	Auditor:	
Form tolerance	± 2 mm				
Thickness tolerance	± 0.1 mm	Galvalume = Aluminized Steel = 45% Zinc 55% Aluminum alloy coated			
Angle tolerance	± 1° mm				

Part# 15993

Included in Kit 17713SS

Customer

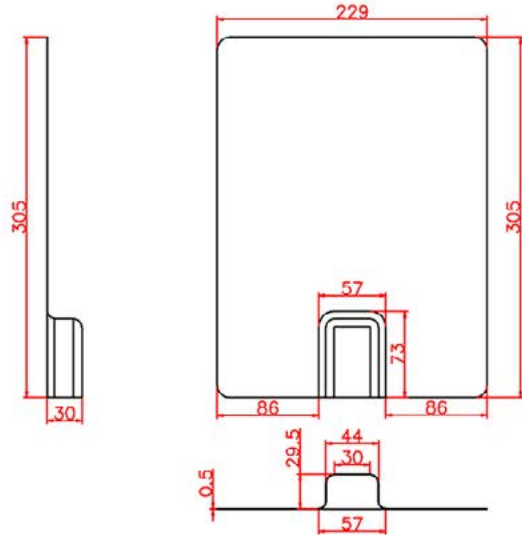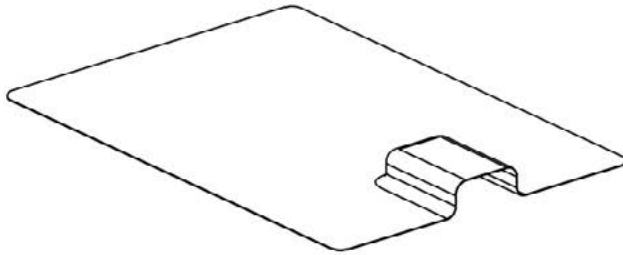

Technical requirement : The dimensions of the hooks are in accordance with the drawings.
Surface smooth, without burr.

Baiting tolerance	± 2 mm	Material:	Galvalume with Black Powder Coating	Mapper:	
Hole tolerance	± 0.5 mm				
Hole distance tolerance	± 0.5 mm	Date:	10/10/18	Auditor:	
Form tolerance	± 2 mm				
Thickness tolerance	± 0.1 mm				
Angle tolerance	± 1° mm				