

DNA™ 108 Bifacial

Solar for Innovators


Residential | Commercial



Designed & Engineered in Silicon Valley 400W | 405W | 410W

Our DNA Split Cell Series uses advanced selective emitter PERC technology with thin film layers to improve heat tolerance, increase photon capture, minimize resistive loss, and use 5% more of the available active area for optimal power performance. Our panels exceed IEC standards and come with an industry leading, 30-year warranty.

Linear Performance Warranty

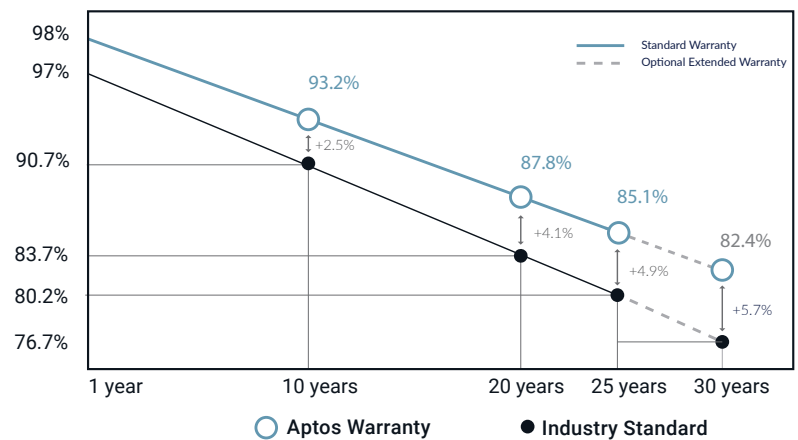

Features



Advanced Technology

Patented DNA™ technology boosts power performance & module efficiency



Maximum Panel Density

Advanced split cell technology with 10 ultra-thin busbars allows for less resistance and more photon capture





Durable Design

Robust product design is resilient in extreme weather. Up to 5400 Pa snow load and 5400 Pa wind load



A Safe Investment

Industry leading 30 year warranty

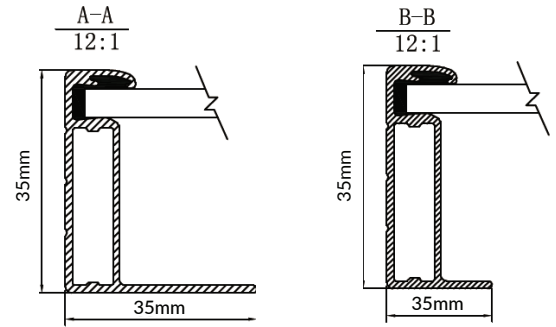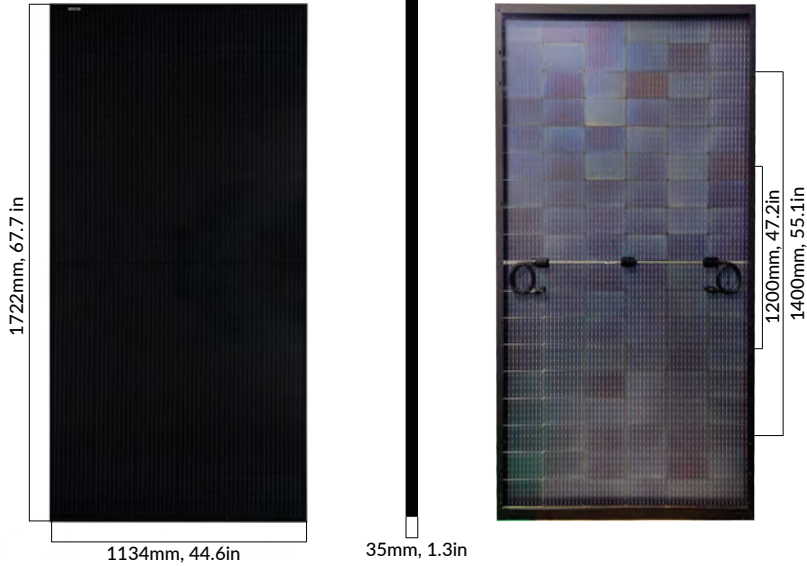

Electrical Specifications

	DNA-108-BF10-400W	DNA-108-BF10-405W	DNA-108-BF10-410W
STC Rated Output P_{mpp} (W)	400W	405W	410W
Module Efficiency	20.50%	20.70%	21.00%
Open Circuit Voltage V_{VOC} (V)	37.10	37.20	37.30
Short Circuit Current I_{sc} (A)	13.79	13.87	13.95
Rated Voltage V_{mp} (V)	31.00	31.20	31.50
Rated Voltage I_{mp} (A)	12.90	12.98	13.04

Standard Test Conditions for front-face of panel: 1000 W/m², 25°C, measurement uncertainty $\leq 3\%$

Mechanical Properties

Cell Type	Monocrystalline
Glass	3.2mm, anti-reflection coating, high transmission, low iron, tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	300mm
Dimensions	1722 X 1134 X 35 mm, 67.7 X 44.6 X 1.3 in
Output Cable	4mm ² (EU)12AWG,39.37in.(1200mm)
Weight	22.0kg
Cable Length	1200mm


Bifacial Output-Rearside Power Gain

5%-Maximum Power (Pmax)	420W	425W	431W
5%-Module Efficiency STC(%)	19.46%	19.71%	19.95%
15%-Maximum Power (Pmax)	460W	466W	472W
15%-Module Efficiency STC(%)	21.32%	21.58%	21.85%
25%-Maximum Power (Pmax)	500W	506W	513W
25%-Module Efficiency STC(%)	23.17%	23.46%	23.75%

Test Operating Conditions

Maximum Series Fuse	30A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL 1703)	5400 PA Snow Load / 5400 Pa Wind Load
Fire Performance Class	Class C/Type 1

I-V Curve

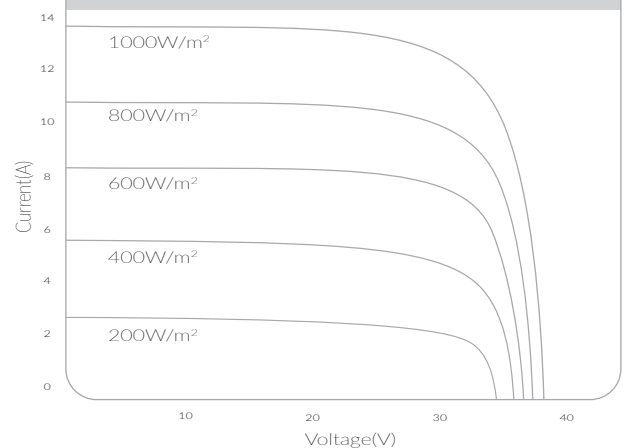

Temperature Coefficients

Temperature Coefficients P_{mp}	-0.350%/°C
Temperature Coefficients I_{sc}	+0.048%/°C
Temperature Coefficients V_{oc}	-0.280%/°C
Normal Operating Cell Temperature (NOCT)	45°C±2°C

Packaging Configuration

Modules per Pallet	31
Pallets per 40ft. Container	26
Pallet Dimensions	1752 X 1130 X 1264 mm
Pallet Weight (kg)	720
Modules per 40ft. Container	806

Certifications

