

SOLAR'S MOST TRUSTED




REC TWINPEAK 2S 72 SERIES

**PREMIUM SOLAR PANELS
100% MADE IN SINGAPORE**


REC TwinPeak 2S 72 Series solar panels feature an innovative design with high efficiency and an industry-leading lightweight, yet robust construction, enabling customers to get the most out of the installation area.

Combined with the product quality and reliability of a strong and established European brand, REC TwinPeak 2S 72 panels are ideal for commercial rooftops worldwide.


INTEGRATED MANUFACTURING IN SINGAPORE



WAFERS




CELLS



MODULES



REC TWINPEAK 25 72 SERIES

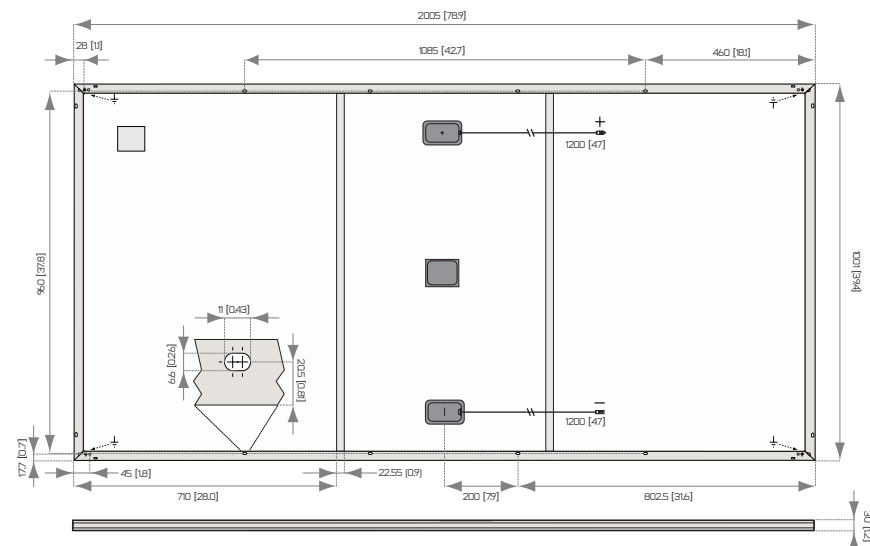

All measurements in mm [in]

ELECTRICAL DATA @ STC	Product Code*: RECxxxTP25 72					
Nominal Power - P_{MPP} (Wp)	330	335	340	345	350	355
Watt Class Sorting - (W)	-0/+5	-0/+5	-0/+5	-0/+5	-0/+5	-0/+5
Nominal Power Voltage - V_{MPP} (V)	38.1	38.3	38.5	38.7	38.9	39.1
Nominal Power Current - I_{MPP} (A)	8.67	8.75	8.84	8.92	9.00	9.09
Open Circuit Voltage - V_{OC} (V)	46.0	46.2	46.3	46.5	46.7	46.8
Short Circuit Current - I_{SC} (A)	9.44	9.52	9.58	9.64	9.72	9.78
Panel Efficiency (%)	16.5	16.7	16.9	17.2	17.4	17.7

Values at standard test conditions STC (airmass AM 1.5, irradiance 1000 W/m², cell temperature 77°F (25°C)).
At low irradiance of 200 W/m² (AM 1.5 and cell temperature 77°F (25°C)) at least 95% of the STC module efficiency will be achieved.
*xxx indicates the nominal power class (P_{MPP}) at STC, and can be followed by the suffix XV for modules with a 1500 V maximum system rating.

ELECTRICAL DATA @ NOCT	Product Code*: RECxxxTP25 72					
Nominal Power - P_{MPP} (Wp)	244	252	257	260	264	268
Nominal Power Voltage - V_{MPP} (V)	34.9	35.5	35.7	35.8	36.0	36.2
Nominal Power Current - I_{MPP} (A)	6.99	7.10	7.19	7.25	7.32	7.39
Open Circuit Voltage - V_{OC} (V)	42.3	42.8	42.9	43.1	43.2	43.3
Short Circuit Current - I_{SC} (A)	7.44	7.74	7.79	7.84	7.90	7.95

Nominal cell operating temperature NOCT (800 W/m², AM 1.5, windspeed 1 m/s, ambient temperature 68°F (20°C)).
*xxx indicates the nominal power class (P_{MPP}) at STC, and can be followed by the suffix XV for modules with a 1500 V maximum system rating.

CERTIFICATION



UL 1703, Fire classification: Type 1 (1500 V XV); Type 2 (1000 V);
IEC 61215, IEC 61730, IEC 62804 (PID), IEC 62716 (Ammonia),
IEC 61701 (Salt Mist level 6), ISO 11925-2 (Class E)
ISO 9001: 2015, ISO 14001: 2004, OHSAS 18001: 2007

WARRANTY

10 year product warranty.
25 year linear power output warranty
(max. degradation in performance of 0.7% p.a.)

17.7% EFFICIENCY
10 YEAR PRODUCT WARRANTY
25 YEAR LINEAR POWER OUTPUT WARRANTY

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	44.6°C (±2°C)
Temperature Coefficient of P_{MPP}	-0.36 %/°C
Temperature Coefficient of V_{OC}	-0.30 %/°C
Temperature Coefficient of I_{SC}	0.066 %/°C

GENERAL DATA

Cell type:	6 strings of 24 REC HC multicrystalline PERC
Glass:	0.13" (3.2 mm) solar glass with anti-reflection surface treatment
Back Sheet:	Highly resistant polyester
Frame:	Anodized aluminum (silver)
Support bars:	Anodized aluminum (bonded to backsheet)
Junction Box:	IP67 rated with 3 bypass diodes 12 AWG (4 mm ²) PV wire, 47" + 47" (1.2 m + 1.2 m)
Connectors:	Tonglin TL-Cable01S-F (4 mm ²) (1500V) Tonglin TL-Cable01S-FR (4 mm ²) (1000V)
Origins:	Silicon: Made in USA & Norway Wafer/Cell/Module: Made in Singapore

MAXIMUM RATINGS

Operational Temperature:	-40...+185°F (-40...+85°C)
Maximum System Voltage:	1000 V / 1500 V* *Dependent on product type
Design Load:	(+) 75.2 lbs/ft ² (3600 Pa)
Design Load:	(-) 33.4 lbs/ft ² (1600 Pa) Refer to installation instructions

Max Series Fuse Rating:	20 A
Max Reverse Current:	20 A

MECHANICAL DATA

Dimensions:	78.9" x 39.4" x 1.2" (2005 x 1001 x 30 mm)
Area:	21.6 ft ² (2.01 m ²)
Weight:	48.5 lbs (22 kg)

Note! Specifications subject to change without notice.

